

FC

Filter Cart

A fully self-contained mobile solution for bulk oil handling, fluid transfer and reservoir or gearbox conditioning.

Ideal for lower viscosity hydraulic oil, lube oil and diesel fuel.

Donaldson.
HY-PRO™

hyprofiltration.com/



Engineered for industrial use.

Rugged construction and attention to the smallest of details come together remarkably so that nothing holds you or your equipment back. The easy to maneuver hand-truck style design with never-flat pneumatic tires and cast iron gear pump with internal relief mean you get powerful filtration exactly when and where you need it.



Set the stage for your success.

Staged filtration allows a range of media selections for particulate and water removal to deliver ISO Codes right on target. Choose between dual MF110 cartridge (standard) or up to four Spin-On elements to tackle the most viscous fluids and achieve unimaginably low ISO Codes in a single pass.

Media matters.

DPE rated filter elements stay true to efficiency ratings and ensure the highest level of particulate capture and retention capabilities. And with media options down to $\beta_{3[C]} \geq 4000$, you can be sure contamination stays exactly where you want it: out of your systems.



Your standard Filter Cart, reimagined.

Sample ports in the right locations arm you with access to consistently accurate system conditions which is why every FC comes standard with up- and downstream sample ports in their proper positions. And with the 35' (11m) retractable cord reel or 35' air hose for pneumatic models, it's easy to see why the standard FC isn't so standard after all.


With options to make your job easier.

With the optional filter bypass line, cold starts, gearbox pump-outs, and even element change outs become easier than ever. Add the optional PM-1 particle monitor for real time cleanliness data and know exactly how your filtration is performing without the need for a bottle.



Completely customizable.

The FC comes in a variety of flow rates and with electric options that range from 120 to 575 V ac, single or three phase. Or choose the pneumatic and explosion proof models to take your filtration into hazardous zones like you never thought possible. Even color coordinate each FC to your existing safety standards. With thousands of combinations to choose from, the possibilities are endless for what you can do with the FC.

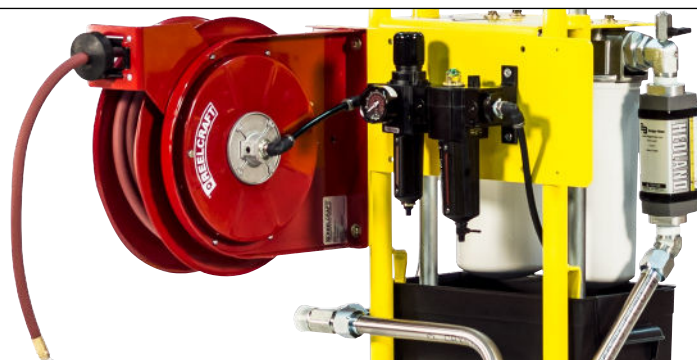

FC Specifications

Dimensions ¹	Height 45" (114 cm)	Width 20" (50 cm)	Depth 23" (58 cm)	Approximate Weight 125 lbs (57 kg)			
Connections	Inlet FC05-FC5: 1" male JIC (37° flare) FC10: 1.25" male JIC (37° flare) FC20: 1.5" male JIC (37° flare)	Outlet FC05-FC10 1" male JIC (37° flare) FC20: 1.25" male JIC (37° flare)	Hoses FC05-FC5: 1" x 10 ft (2.4 m) FC10: 1.25" x 10 ft (2.4 m) suction 1" x 10 ft (2.4 m) discharge FC20: 1.5" x 10 ft (2.4 m) suction				
Operating Temperature	Fluid Temperature 30°F to 225°F (0°C to 105°C)	Ambient Temperature -4°F to 104°F (-20C to 40C)					
ΔP Indicator Trigger	22 psi (1.5 bar). Consult factory for other options.						
Filter Assembly Bypass	25 psid (1.7 bard). Consult factory for other options.						
Materials of Construction	Frame Industrial coated steel	Filter Assembly Aluminum head & canister	Hoses Reinforced synthetic	Wands Stainless Steel Element Bypass Valve Nylon			
Electric Motor	TEFC, 56-215 frame 0.5-7.5 hp, 900-1750 RPM						
Motor Starter	MSP (motor starter/protector) in an IP55, aluminum enclosure with short circuit and overload protection.						
Electric Connection	Voltages 230 V ac and under, single phase: 35' (11 m) retractable cord reel included. NEMA 5-15 plug installed on Power Option 12. Voltages over 230 V ac: 35' (11 m) power cord included.						
Pump	Cast iron, positive displacement gear pump with internal relief. Maximum pressure on pump inlet 15 psi (1 bar). Consult factory for higher pressures.						
Pump Bypass	Full bypass at 150 psi (10 bar) ²						
Pneumatic Option Air Consumption	~40 cfm @ 80 psi ³ 35' (11 m) retractable air hose included when pneumatic option selected (replaces electric cord reel).						
Media Description	M G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{[C]}} \geq 4000$ ($\beta_x \geq 200$)	A G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{[C]}} \geq 4000$ ($\beta_x \geq 200$)	W Stainless steel wire mesh media $\beta_{x_{[C]}} \geq 2$ ($\beta_x \geq 2$)				
Replacement Elements	To determine replacement elements, use corresponding codes from your equipment part number: <table><tr><td>Model Standard FC (2x MF110 11" bowls) Special Option D1</td><td>Filter Element Part Number HP110NL11 – [Media Selection Code] [Seal Code] HP75L8 – [Media Selection Code] [Seal Code]</td><td>Example HP110NL11-12MV HP75L8-25MB</td></tr></table>				Model Standard FC (2x MF110 11" bowls) Special Option D1	Filter Element Part Number HP110NL11 – [Media Selection Code] [Seal Code] HP75L8 – [Media Selection Code] [Seal Code]	Example HP110NL11-12MV HP75L8-25MB
Model Standard FC (2x MF110 11" bowls) Special Option D1	Filter Element Part Number HP110NL11 – [Media Selection Code] [Seal Code] HP75L8 – [Media Selection Code] [Seal Code]	Example HP110NL11-12MV HP75L8-25MB					
Viscosity	2-5000 cSt ⁴						
Fluid Compatibility	Petroleum and mineral based fluids, #2 diesel fuels (standard). For specified synthetics contact factory for compatibility with fluorocarbon seal option. For phosphate ester (P9) or skydrol fluid (S9) compatibility select fluid compatibility from special options.						
Hazardous Environment Options	Select pneumatic powered unit (Power Option 00) or explosion proof NEC Article 501, Class 1, Division 1, Group D. Call for IEC, Atex or other requirements. If Explosion Proof option (X--) selected, no electrical cord will be included.						

¹Dimensions & weights are approximations taken from base model and will vary according to options chosen.

²10 GPM pump is rated for intermittent duty only at pressures above 100 psi. Continual operation with dual clogged filters resulting in operating pressures over 100 psi will reduce pump life and/or cause premature pump failure.

³Air consumption values are estimated maximums and will vary with regulator setting.

⁴When sized and installed appropriately. Contact factory for applications above 800 cSt for sizing requirements.

FC Part Number Builder

FC - -

Flow Rate Power Options Hose Connection Special Options Media 1 Media 2 Seal

Flow Rate¹	05	0.5 gpm (1.7 lpm)	900 RPM (50Hz) / 1200 RPM (60Hz)
	1	1 gpm (3.7 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)
	2	2 gpm (7.5 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)
	5	5 gpm (18.9 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)
	10²	10 gpm (37.9 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)
	20³	20 gpm (75.7 lpm)	1450 RPM (50Hz)/ 1750 RPM (60Hz)

Power	60 Hz		50 Hz		Pneumatic
Options	12	120 V ac, 1P	11	110 V ac, 1P	00 Pneumatically driven air motor & PD pump. FRL & flow meter included.
Contact factory	22	208-230 V ac, 1P	21	220 V ac, 1P	
for options	23	208-230 V ac, 3P	40	380-440 V ac, 3P	
not listed	46	460-480 V ac, 3P	52	525 V ac, 3P	
	57	575 V ac, 3P			

Explosion proof - Class 1, Division 1, Group D per NEC 501 – Ready for outdoor use
X__ Add X prefix to power option listed above. Not available with (00) Pneumatic Option

Hose Connection	G	Female BSPP swivel hose ends, no wands
	S	Female JIC swivel hose ends, no wands
	W	Female JIC swivel hose ends, with wands

Special Options	B	Complete filter bypass line	K	HP75L8-149W Spin-On suction strainer (Can't be paired with K option)
	C	CE marked for machinery safety directive 2006/42/EC	M	Total system flow meter (120 cSt max)
	D1⁴	2 x S75DL8 filter assemblies in series	O⁵	On-board PM-1 particle monitor & clean oil indicator light
	D3	True differential pressure gauge, visual green to red	P9⁶	Phosphate ester fluid compatibility modification
	E	100 mesh cast iron basket strainer (Can't be paired with K option)	S9⁷	Skydrol fluid compatibility modification
	H1	10' (3 m) return line hose extension	U	CUL and/or CSA marked starter enclosure for Canada
	H2	20' (6 m) return line hose extension	Z	On site start-up training
	J	Add pressure gauge between pump & filter assembly		

Media Selection	G8 Dualglass		G8 Dualglass + water removal		Stainless wire mesh	
	1M	$\beta_{3[C]} \geq 4000$	3A	$\beta_{4[C]} \geq 4000$	25W	25μ nominal
	3M	$\beta_{4[C]} \geq 4000$	6A	$\beta_{6[C]} \geq 4000$	40W	40μ nominal
	6M	$\beta_{6[C]} \geq 4000$	10A	$\beta_{11[C]} \geq 4000$	74W	74μ nominal
	10M	$\beta_{11[C]} \geq 4000$	25A	$\beta_{22[C]} \geq 4000$	149W	149μ nominal
	16M	$\beta_{16[C]} \geq 4000$				
	25M	$\beta_{22[C]} \geq 4000$				

Seals	B	Nitrile (Buna)
	V	Fluorocarbon
	E-WS⁸	EPR seals + stainless steel support mesh

¹Nominal flow rates at 60 Hz motor speeds.

²Has a max viscosity 200cSt limitation with 1P electrical option, and not available with "O" special option.

³Contact factory for sizing assistance on all viscosities.

⁴Replaces standard MF110 housings.

⁵"O" option includes "J" option, do not have to add to part number. "O" option not available with "X__" options.

⁶When selected, must be paired with Seal option "V". Contact factory for more information or assistance in fluid compatibility.

⁷When selected, must be paired with Seal option "E-WS". Contact factory for more information or assistance in fluid compatibility.

⁸Only available in 3M media for HP75L8 series elements.

For all up to date option details and compatibilities, please reference our Contamination Solutions Price List or contact customer service.

Want to find out more? Get in touch.

hyprofiltration.com

info@hyprofiltration.com

+1 317 849 3535

© 2025 Donaldson Company, Inc. All rights reserved.



F119886-100125-EM